


8 CH NVR

12MP/9MP/8MP/6MP/5MP/4MP/3MP/1080P/960P/720P HD NVR

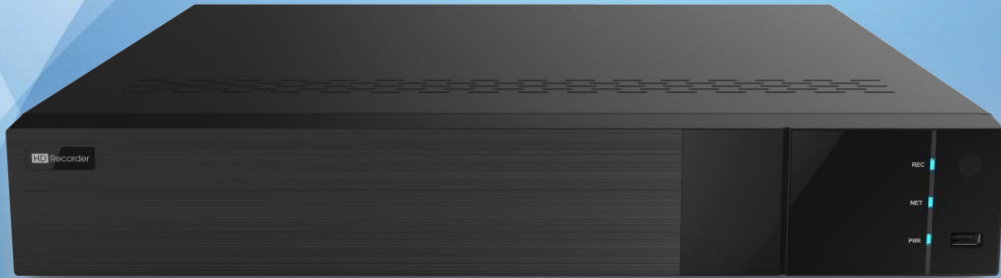

VTD-3300H4-B2

- 
4K Output
- 
HD IPC
- 
DDNS
- 
Network
- 
PTZ
- 
Audio
- 
MIC
- 
Mobile
- 
CMS
- 
USB
- 
Mouse
- 
E-mail
- 
STD
- 
FR
- 
VCA

VTD-3300H4-B2 series supports 16/32 CH 12MP / 9MP / 8MP / 6MP / 5MP / 4MP / 3MP / 1080P / 1280x1024/960P/ 720P high definition IP input, which adopts the advanced SOC technique to ensure high definition recording in each channel and realize outstanding robustness of the system.

VTD-3300H4-B2 series supports 16/32CH IPC input , simultaneous 16CH playback, and 4K high definition display. The series of product can meet different security requirements of home, financial, commerce, enterprise, transportation and government, etc.



SPECIFICATIONS



Model		VTD-3308H4-B2
System	OS	Embedded Linux
Video	Compression	H.265S/H.265+/H.265/H.264
	IP Video Input	8CH IPC input
	Resolution	12MP/9MP/8MP/6MP/5MP/4MP/3MP/1080P/1280×1024/960P/720P/960H/D1/CIF
	Network Bandwidth	192Mbps/192Mbps (incoming/outgoing)
	Output	HDMI1 : 3840 × 2160/1920 × 1080 / 1280 × 1024 / 1024 × 768 HDMI2 : 1920 × 1080 / 1280 × 1024 / 1024 × 768 VGA ×1 : 1920 × 1080 / 1280 × 1024 / 1024 × 768 VGA and HDMI1 output the same video source
Audio	Multi-screen Display	Main output: 1/4/6/8/9/13/16 (live view)AUX output: 1/4/6/8/9 (live view) Max. 16+9CH local live view
	Network Input	8 CH IPC audio input
	2-way Audio	RCA × 1
	Local Output	RCA × 1
Record	Compression	G.711(U/A)
	Resolution	12MP/9MP/8MP/6MP/5MP/4MP/3MP/1080P/1280×1024/960P/720P/960H/D1/CIF
Playback	Frame Rate	12MP: 20fps 9MP or lower resolution: NTSC: 30fps; PAL: 25fps
	Simultaneous Playback	Max 8 CH
	Search	Time slice / time / event / tag / smart search
	Smart Search	Highlighted color to display the camera record in a certain period of time, different colors refers to different record events
Decoding Capability	Function	Play, pause, FF, FB, digital zoom, etc.
	Live View/ Playback	1CH 12MP/4CH 1080P
Alarm	Mode	Manual, sensor, motion, exception, smart events, etc.
	Input	8 CH local alarm input
	Output	4 CH
	Triggering	Record, snap, preset, e-mail, etc.
Face	Face Detection Performance (AI by IPC)	8CH
	Face Detection Performance (AI by Device)	2 CH
	Face Match Performance	6 CH
	Comparison Capability	18 pictures / second
	Face Picture Database	32 libraries 10000 Face Pictures
	Face Picture Search	Search by picture is supported
	Database Management	Add, modify, delete and search face pictures
	Face Picture Adding	Add face pictures through APP, WEB and external import
	Face Picture Comparison	Support allow list, block list and stranger match alarm
	Track	Track display on a map

Face	Statistical Graph of Information	Bar graph
	Statistical Mode of Information	Statistics by day, week, month, quarter as well as customized time period
Video Structure Analysis	Human/Vehicle Classification	Yes
Other Functions	Fisheye	Supports fisheye dewarping via Web Client and mobile APP
	Plate Recognition (AI by IPC)	Yes
Network	Interface	RJ 45 1000 Mbps × 2
	Protocol	TCP / IP, HTTP, HTTPS, 802.1X, FTP, DHCP, DDNS, RTP, RTSP, RTCP, NTP, UPnP, SMTP, IPv6, IPv4, UDP, WebSocket, PPPoE, SNMP, IGMP
Mobile Device	OS	iOS, Andriod
Storage	HDD Interface	SATA × 2, max 10T for each HDD
Backup	Local Backup	U disk, USB mobile HDD
	Network Backup	Yes
External Interface	RS 485	Yes (full-duplex), connect to PTZ or keyboard
	USB	USB 3.0 × 1 ; USB 2.0 × 2
	Remote Controller	Optional
Others	Power Supply	ATX 250W
	Consumption	≤ 20W (without HDD)
	Certificate	CE, FCC,UL,BIS
	Environmental Protection	Directive EU RoHS, REACH and WEEE
	Dimensions(mm)	440 × 390 × 70 (W × D × H)
Working Environment	-10 ~ 50 °C , 10% ~ 90% humidity	

Features

- Support 8CH 12MP/9MP/8MP/6MP/5MP/4MP/3MP/1080P/1280×1024/960P/720P/960H/D1/CIF IPC Input
- H.265S/H.265+/H.265/H.264
- Intuitive and user-friendly Graphic User Interface (GUI), Windows style operation by mouse
- Multi-type recording: manual / timed / motion / sensor / POS / AI recording
- Playback : 8 CH simultaneous
- playback Search : time slice, time, event, tag and smart
- search Support face detection and comparison Support multiple VCA (Video Content Analytics) events, such as object abandoned/missing, region intrusion, tripwire, video exception, etc.
- Support license plate recognition
- Support POS information overlay on live view and playback
- Pentaplex : preview, record, playback, backup and remote access
- DHCP, DDNS, PPPoE network protocol
- Compatible with third-party IPCs, such as ONVIF, Hikvision, etc.
- Remote control via Web Client or CMS : preview, playback, backup, PTZ and configuration
- Dual stream technology for local storage with high definition, remote network transmission and remote surveillance with mobile device
- Multi-user online simultaneously
- Authorization management, log view and device status view
- 4K output, true high resolution display
- Support PTZ preset and auto cruise, up to 255 presets and 8 cruises
- Support NAT function and QRCode scanning by mobile phones
- Powerful mobile surveillance by smart phones with iOS and Andriod OS

DIMENSIONS

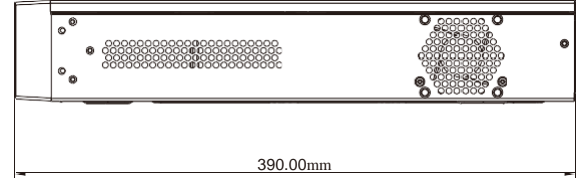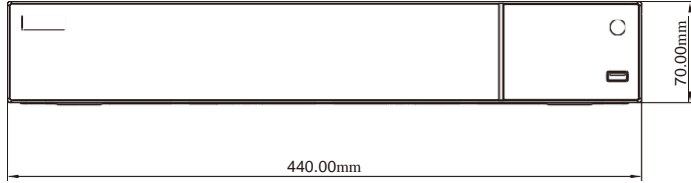

Rear Panel

