

32/64CH NVR

16MP/12MP/8MP/6MP/4MP/3MP/1080P/720P HD NVR



VTD-3332H8-A3

VTD-3364H8-A3



4K Output



HD IPC



DDNS



Network



PTZ



Audio



MIC



Mobile



CMS



USB



Mouse



E-mail



STD



FR



VCA



This series supports 32/64CH 16MP/12MP/8MP / 6MP / 5MP / 4MP / 3MP / 1080P / 1280 × 1024 / 960P / 720P high definition IP video input, which adopts the advanced SOC technique to ensure high definition recording in each channel and realize outstanding robustness of the system. This series supports 32/64 CH IP input, simultaneous 16 CH playback, and 4K high definition display. So it can meet different security requirements of home, financial, commerce, enterprise, transportation and government, etc.



Features

- Support 32/64CH 16MP/12MP/8MP/6MP/5MP/4MP/3MP/1080P/1280x1024/960P/720P/960H/D1/CIF IP input
- H.265S/H.265+/H.265/H.264 coding
- Intuitive and user-friendly Graphic User Interface (GUI), Windows style operation by mouse
- Multi-mode recording: manual / timed / motion / sensor/ POS / AI recording
- Playback: 16 CH simultaneous playback
- Search: time slice, time, event, tag, smart and target database search
- Support face detection and comparison
- Support multiple VCA (Video Content Analytics) events, such as region intrusion, tripwire, etc.
- Support OS information overlay on live view and playback
- Support RAID 0, 1, 5, 6, 10
- Express and flexible backup via USB, network and so on
- Preview, record, playback, backup and remote access are supported
- DHCP, DDNS, PPPoE network protocol, etc.
- Compatible with third-party IPCs, such as ONVIF, Hikvision, etc.
- Remote control via Web Client or CMS : preview, playback, backup, PTZ and configuration
- Multi-user online simultaneously
- Authorization management, log view and device status view
- 4K output, true high resolution display
- Support PTZ preset and auto cruise, up to 255 presets and 8 cruises
- Support NAT function and QR Code scanning by mobile phones
- Powerful mobile surveillance by smart phones with iOS and Andriod OS

Dimensions

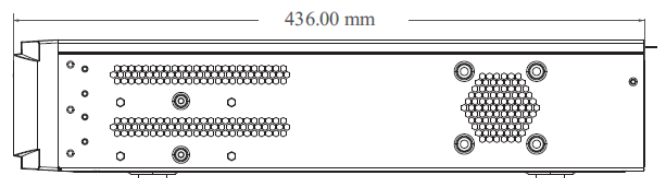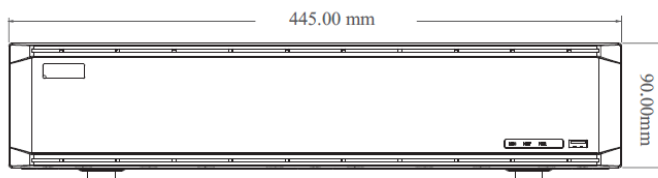

Specifications

Model	VTD-3332H8-A3	VTD-3364H8-A3	
System	OS	Embedded Linux	
Video	IP Video Input	32	64
	Network Bandwidth	Incoming: 320Mbps Outgoing: 320Mbps	Incoming: 512Mbps Outgoing: 512Mbps
	Resolution	16MP/12MP/8MP/6MP/5MP/4MP/3MP/1080P/1280x1024/960P/720P/960H/D1/CIF	
	Output	HDMI1: 3840×2160@60, 3840×2160@30, 1920×1080, 1280×1024, 1024×768 HDMI2: 3840×2160@60, 3840×2160@30, 1920×1080, 1280×1024, 1024×768 VGA×1: 1920×1080, 1280×1024, 1024×768 (VGA and HDMI1 output the same video source)	
	Multi-screen Display	Main output: 1/4/6/8/9/13/16/25/32/36 AUX output: 1/4/6/8/9/13/16	Main output: 1/4/6/8/9/13/16/25/32/36/64 AUX output: 1/4/6/8/9/13/16
	Compression	H.264/H.265/H.265+/H.265S	
Audio	Network input	32	64
	Local Input	RCA×1 (for two-way talk)	
	Local Output	RCA×1	
	HDMI Audio Output	Support	
	Compression	G.711(U/A)	
Record	Resolution	16MP/12MP/8MP/6MP/5MP/4MP/3MP/1080P/1280x1024/960P/720P/960H/D1/CIF	
	Frame Rate	N:30fps; P:25fps	
Playback	Simultaneous Playback	16CH	
	Search	Time slice/time/event/tag/smart search	
	Function	Play, pause, FF, Rewind, digital zoom, previous frame, next frame, etc.	
Decoding Capability	Live View/ Playback	Non-AI mode: 4×16MP@30fps, 9×6MP@30fps, 16×4MP@30fps AI mode: 4×12MP@30fps, 9×5MP@30fps, 16×3MP@30fps	
Alarm	Mode	Manual, sensor, motion, exception, smart events, etc.	
	Input	16CH	
	Output	4CH	
	Triggering	Record, snapshot, preset, e-mail, etc.	
Face	Face Detection Performance (AI by IPC)	32CH	64CH
	Face Detection Performance (AI by Device)	4CH(4MP)	
	Face Match Performance	16CH	
	Comparison Capability	36 pictures/second	
	Face Picture Database	32 libraries 10000 face pictures	
	Face Picture Search	Search by picture is supported	
	Database Management	Add, modify, delete and search face pictures	
	Face Picture Adding	Add face pictures through APP, WEB and external import	
	Face Picture Comparison	Supports successful face recognition alarm and stranger match alarm	
	Track	Track display on a map	
	Statistical Graph of Information	Bar graph	

	Statistical Mode of Information	Statistics by day, week, month, quarter as well as customized time period	
Perimeter Protection	Human/Vehicle Classification (AI by IPC)	32CH	64CH
	Human/Vehicle Classification (AI by Device)	8CH (2MP)	
Video Metadata	Human/Vehicle Attribute Analysis (AI by IPC)	Yes	
Other Functions	Fisheye	Supports fisheye dewarping via NVR/Web Client/mobile APP	
	Plate Recognition (AI by IPC)	Yes	
Network	Protocol	TCP/IP, HTTP, HTTPS, 802.1x, FTP, DHCP, DDNS, RTP, RTSP, RTCP, NTP, UPnP, SMTP, IPv6, UDP, WebSocket, PPPoE, SNMP, IGMP	
	Interface	RJ45 10/100/1000Mbps x2	
	Client Connection	Max. 128 users access	
Mobile Device	OS	iOS, Andriod	
Storage	HDD Interface	SATA x8, max 10TB per HDD	
	RAID Type	RAID0,1,5,6,10	
	E-SATA Interface	2	
Port	USB	USB3.0 x 1; USB2.0 x 2(Front:1);	
	RS485	Yes (full-duplex)	
	Remote Controller	Optional	
Others	Power	ATX-200W	
	Consumption	≤ 30W (without HDD)	
	Dimensions	445 x 436 x 90mm (WxDxH)	
	Certificate	CE, FCC, UL	
	Environmental Protection	Directive EU RoHS, WEEE(2012/19/EU), Directive 94/62/EC and REACH(EC1907/2006)	
	Working Environment	-10~50°C; Humidity: 10%~90%	

Rear Panel

